





# HX88 series

**Oil-Free - Linear Diaphragm Pump**

✓ 1050 to 5,800 litres per minute flow

- ✓ Dual use can be submersed or externally mounted
- ✓ Robust construction with aluminum and ceramic shaft which can handle small particles
- ✓ High quality resin seals shaft ensuring the pump is electrically safe
- ✓ Long service life with low power consumption
- ✓ Integral thermal protection
- ✓ CE and UL approved

Model no.	Performance	Max head (M)	Power consumption w	Weight kg	Dimensions (mm)
	Flow (l/hour)				
HX 8808	650	1.2	8	0.43	130 X 60 X 85
HX 8810	1050	1.4	12	0.66	138 X 83 X 88
HX 8815	1400	1.8	20	0.83	138 X 83 X 88
HX 8820	1950	1.95	25	1.05	157 X 85 X 104
HX 8825	2400	2.15	35	1.14	157 X 85 X 104
HX 8830	2900	2.3	45	1.18	157 X 85 X 104
HX 8840	4000	3.0	70	1.6	216 X 100 X 140

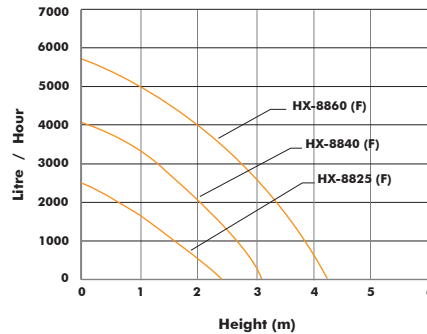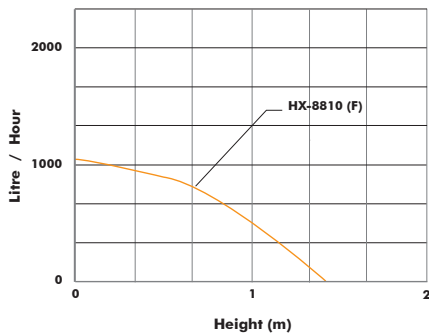

## Related Products



Air Stone



HX88F Series

## Application Ideas



Aquatics